

KM-1300S_H3

3-PHASE STACKABLE ICE CUBER

Item # _____

Project: _____

Qty: _____

*AutoCad available on KCL

KM-1300S_H3


4/08

Item # 13078


CUBER DIMENSIONS

W x D x H


KM-1300S_H3
48 x 27^{3/8} x 27^{3/8}




B-800



B-900



B-800



B-900

Also available on Large Bins:
B-1150SS
B-1300SS
B-1500SS
B-1650SS

KM-1300SAH3

Air-Cooled

KM-1300SWH3



Water-Cooled

Shown on an optional
B-900

KM-1300SRH3

Remote Air-Cooled



- Up to 1320 lbs. of ice production per 24 hours
- Durable stainless steel exterior
- Protected by *HoshiGuard* Antimicrobial Agent **HOSHIGUARD**
- CycleSaver® design 
- EverCheck® alert system 
- Individual crescent cube
- Stainless steel evaporator
- Stackable for 2640 lbs. per 24 hour ice production in the same floor space
- Removable air filters (Air-cooled model only)
- R-404A Refrigerant
- Complies with California Energy Commission guidelines (CEC)
- * The KM-1300SAH3 and KM-1300SRH3 are ENERGY STAR certified.

Warranty

Valid in United States, Canada, Puerto Rico, & U.S. Territories. Contact factory for warranty in other countries.

Three Year - Parts & Labor on entire machine.

Five Year - Parts & Labor on: Evaporator.

Five Year - Parts on: Compressor, air-cooled condenser coil.



© HOSHIZAKI AMERICA, INC.

618 Hwy. 74 S., Peachtree City, GA 30269

TEL 1-800-438-6087

FAX 1-800-345-1325

www.hoshizaki.com



Hoshizaki

DIMENSIONS
W x D x H
KM-1300S_H3
48 x 27^{3/8} x 27^{3/8}

STACKABLE ICE CUBER

KM-1300S_H3 3-PHASE STACKABLE ICE CUBER

- Air-cooled
- Water-cooled
- Remote Air-cooled

AIR - COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1320	1265	1153
80°	1278	1192	1060
90°	1265	1132	1006

WATER - COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1254	1264	1191
80°	1261	1276	1157
90°	1264	1287	1186

REMOTE AIR - COOLED

Water Temp ° F.	50°	70°	90°
Air Temp ° F.			
70°	1308	1296	1203
80°	1299	1279	1145
90°	1296	1266	1148

UTILITY CONSUMPTION

Model Number	Ice Production Per Cycle		KWH per 100 LBS.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.
	Lbs.	Cubes			
KM-1300SAH3	30.1	1440	4.9	23.6	N/A
KM-1300SWH3	30.1	1440	3.9	22.7	72
KM-1300SRH3	30.1	1440	4.4	19.8	N/A

SPECIFICATIONS

Model Number	Condenser	Amperage	Min. Circuit Ampacity	Shipping Weight
KM-1300SAH3	Air-Cooled	7.8	20	325 lbs.
KM-1300SWH3	Water-Cooled	6.9	20	325 lbs.
KM-1300SRH3	Remote Air-Cooled	10.8	20	325 lbs.

STORAGE BINS


Model Number	Application Capacity	ARI-Rated Capacity
B-800	800 lbs.	600 lbs.
B-900	900 lbs.	660 lbs.
B-1150	1150 lbs.	N/A
B-1300	1275 lbs.	N/A
B-1500	1490 lbs.	N/A
B-1650	1605 lbs.	N/A

ELECTRICAL & PLUMBING/KM-1300S_H3


- 208 - 230V/60/3
- 20 amp Max Fuse
- 1/2" OD copper or equivalent potable water supply
- 3/4" FPT independent drain connection




© HOSHIZAKI AMERICA, INC.




FRONT VIEW




SIDE VIEW




ICE DROP ZONE

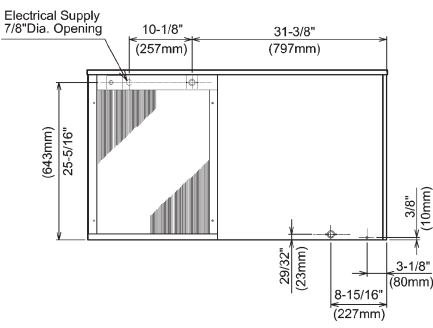

AIR-COOLED UNIT

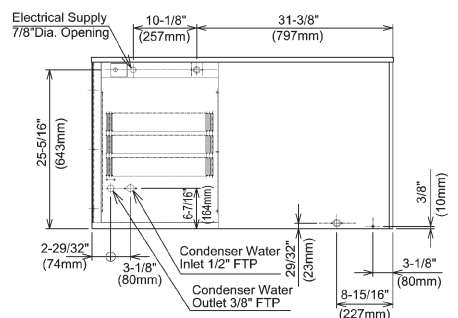



WATER-COOLED UNIT

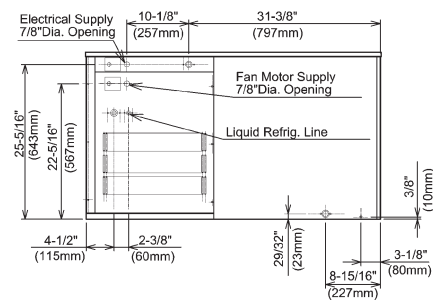

REMOTE AIR-COOLED UNIT

URC-12F Remote Condenser (Sold Separately)

For Use with KM-1300SRH3



Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

OPERATING LIMITS

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113psig
- Voltage Range 187 - 253V

CONDENSING UNIT

- Voltage Range 104 - 127V
- Ambient Temp Range -20 - 122°F

SERVICE

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters. (Air-cooled model only)

